

## Transmitters

### XT/XTi

Transmitters for bypass level indicators

### Features / Description

The measuring principle and construction of this series are identical to those of the XM series, however the XT series is equipped with a 2-wire transmitter module (instead of simple terminals in the KLS terminal box). This transmitter module (transducer) converts the resistance into a 4...20 mA output signal. For e.g. interface measurement the output signal can also be inverted (20...4 mA). A version with linearisation of the tank content graph is available as an option.

Two versions are available:

XT - Standard version

XTi - Ex i for intrinsically safe applications

Transmitter XT with type MU3L, circuit monitoring with selective fault recognition and selective output control (Namur NE43) 3.5 mA or 23 mA, reversed polarity protection.

Transmitter XTi with type MUEX, intrinsically safe transmitter module with ATEX approval TÜV 19 ATEX 239657 X, reversed polarity protection and fault recognition with selective output control (Namur NE 43) 3.5 mA or 23 mA.

### Technical Data

<b>Power supply:</b>	
XT:	8...35 VDC, max. 10% residual ripple
XTi:	8...24 VDC, max. 10% residual ripple
<b>Output:</b>	4...20 mA, reversed polarity protected
<b>Load:</b>	max. 700 Ohm at 24 V
<b>Delay:</b>	0.33 sec
<b>Accuracy:</b>	max. ±0.2% f. s.
<b>Temperature range:</b>	
XT:	-40 °C... +85 °C -50 °C...+150 °C for high-temperature version
XTi:	T1...T4: -40 °C...+85 °C T5 and T6: -40 °C...+60 °C
<b>Note</b>	The configuration of the selective output control for fault recognition is ≤ 3.5 mA unless expressly specified otherwise in the order.

### Order Code

Order number example for XT:

XT	-	HT	-	R12	-	LM2500
----	---	----	---	-----	---	--------


Measuring length LM in mm
Screen R12
HT high-temperature version (option)
Type: XT = KLS (incl. Transducer)

Order number example for XTi :

XTi	-	R12	-	LM2500
-----	---	-----	---	--------

Measuring length LM in mm
Screen R12
Type: XTi = KLS (incl. Transducer)

### Dimensions (mm / inch)

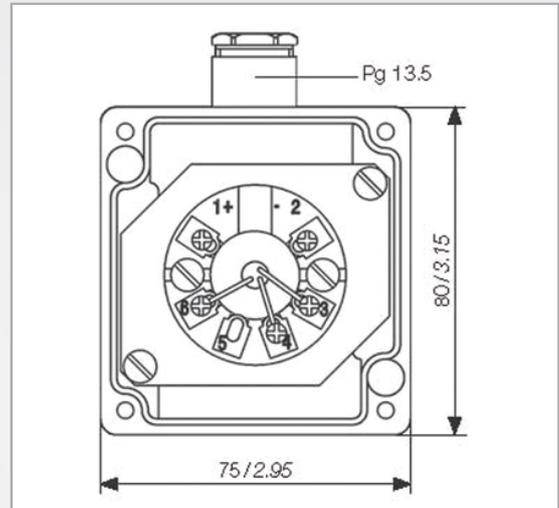

### Circuit diagram

